


DC/DC CONVERTER HI-POT SERIES



A new series for specific custom needs in high voltage applications field

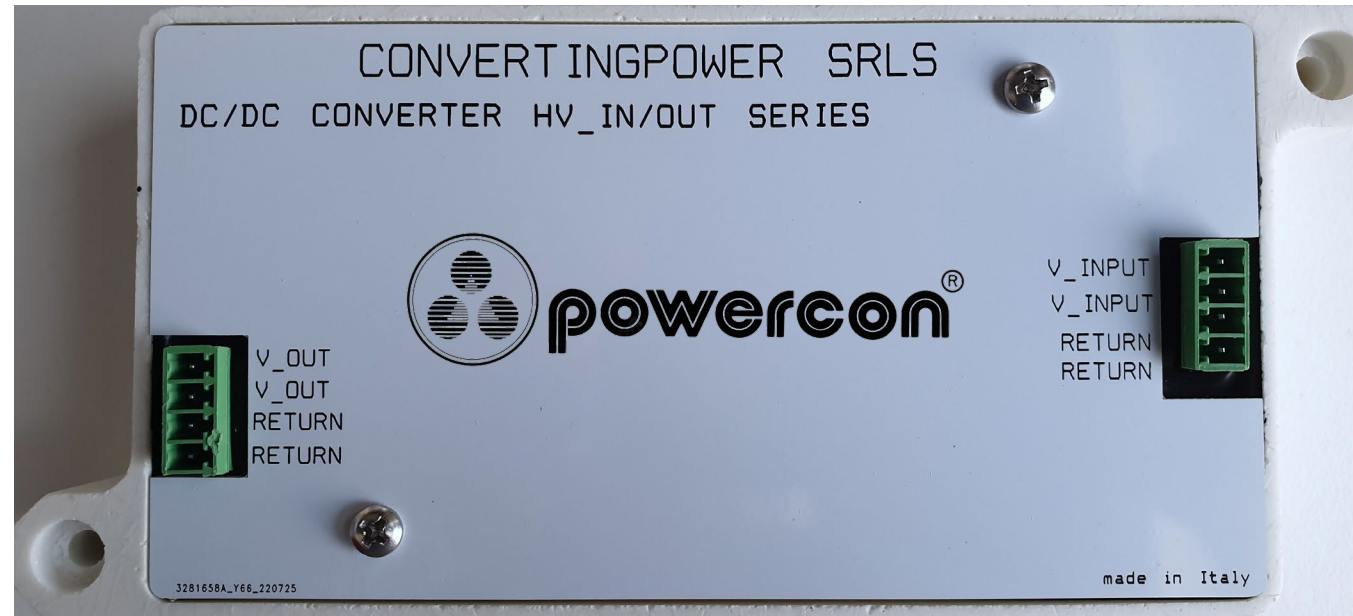

SPECIFICATIONS		
Input voltage	20÷30 / 40÷60 / 80÷120	Vdc
Input current max	2.7 / 1.3 / 0.7	A
Output voltage	12 / 15 / 24	Vdc
Output static variation	2	%
Output current	3	A
DIMENSIONS		
Length	185	mm
Width	80	mm
Height	30	mm
Weight	0,5	Kg
PLUGS AND CONNECTORS		
Input	Phoenix MCVR1,5/4-ST3,81	Female spare
Output	Phoenix MCVR1,5/4-ST3,81	Female spare
Included spare plug adapter		Yes
MECHANICAL FIXING		
Baseplate on wall/plane	2 screw M4 DIN	-
OPERATING ENVIRONMENT		
Temperature	-20 ÷ 70	Degree
Humidity	<90%	-
FEATURES FEATURES		
Safety Compliance	EN60950	-
Emi Compliance	EN61000-6-4	-
Emc Compliance	EN61000-4-4/5/6	Transient-Pulse 20kV @1,2/50uS